


# NC3200K Series

## 10 MHz to 18 GHz

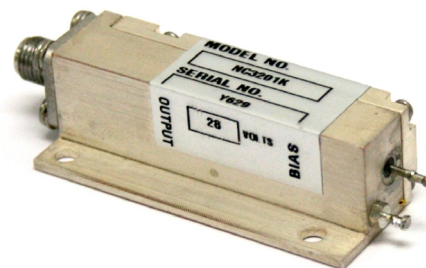

### Calibrated Coaxial AWGN Noise Sources

Noisecom's NC3200 Series offers a high ENR output AWGN noise over a wide frequency range. These calibrated AWGN noise sources have excellent stability with temperature and voltage for tough environments. The compact package is designed for severe environments such as military EW RWR systems. Specials are available upon request.

Like all Noisecom noise sources, the NC3200 Series features hermetically sealed noise diodes and each noise source is supplied with calibration data for the full frequency band.

### Applications


- Radar warning receivers (RWR)
- Built-in test equipment (BITE)
- Military aircraft
- Wi-Fi

### Specifications

Noise output rise and fall times	Less than 1 $\mu$ s (NC3208K)
VSWR	Less than 3:1
Noise output variation	
With temperature	Less than 0.01 dB/ $^{\circ}$ C
With voltage	Less than 0.1 dB/1% $\Delta$ V
Operating temperature	-55 $^{\circ}$ to 85 $^{\circ}$ C
Storage temperature	-65 $^{\circ}$ to +125 $^{\circ}$ C
Input power	+28 VDC 20 mA typical
Noise output	23 to 27 dB ENR

## Options

NC3Kopt01	+15 VDC input voltage
NC3Kopt02	MIL-STD-883 screening

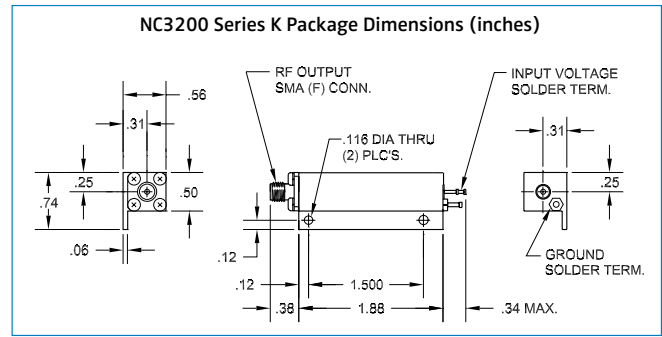

## High Noise Output Types

Model	Frequency Range (GHz)	Noise Output ENR (dB)	Flatness (dB)	VSWR	Calibration Frequencies	I (max) (mA)
NC 3201K	10 kHz - 1 GHz	23-27	± 1	3:1	10, 100, 500 and 1000 MHz	30
NC 3208K	1 GHz - 18 GHz	23-27	± 1	3:1	1 GHz steps	30

**Wireless Telecom Group Inc.**  
 25 Eastmans Rd  
 Parsippany, NJ  
 United States  
 Tel: +1 973 386 9696  
 Fax: +1 973 386 9191  
[www.noisecom.com](http://www.noisecom.com)

© Copyright 2015  
 All rights reserved.

NC/NC3200/0815/EN  
 Note: Specifications, terms and conditions  
 are subject to change without prior notice.